

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 15 TOWNSHIP 15 RANGE 2

DATE: 4-19-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 4-23-01

IN. S.P.C. E ZONE NAD '83

NAME: 15021501

N: 499894.8744(m)

E: 45051.7159(m)

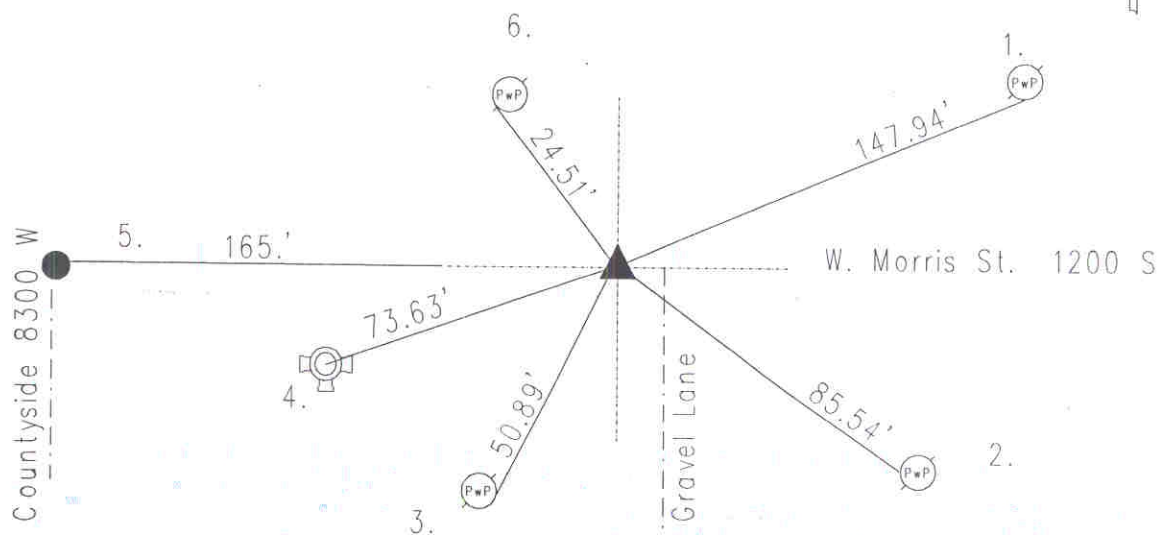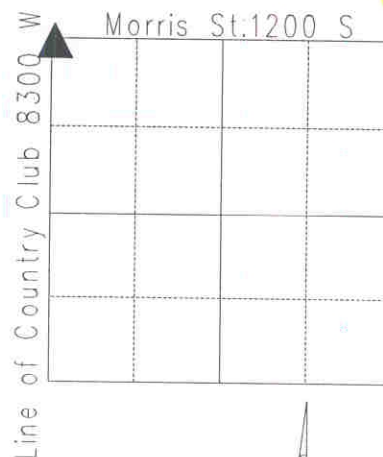

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 10" white oak bearing north 63 degrees, thence west 24 links; and a 12" dogwood bearing south 38 degrees, thence east 6 links. (M.C. Atlas p. 2) A survey by D.B. Hasbrook on May 6, 1853 indicates no stone but the following witnesses: 24" ash bearing south 28.50 degrees, thence east 18.50 links; and a 30" oak bearing south 13.25 degrees, thence east 53 links. (Wayne Legal Book p. 31) A survey by JA Hasbrook on November 22, 1876 indicates a rock by a 24" ash stump bearing south 28.50 degrees, thence east 18.50 links. (Wayne Legal Book p. 59) Corner referenced by Miller on 7/25/77 and called a rebar. Corner referenced by Wilcoxon on 2/13/80 and called a rebar. Corner referenced by Cleveland on 8/24/84 and called a cut x in R.R. spike. Corner referenced by Gries on 1/8/87 and called a cut x in R.R. spike. Corner referenced by Wilcoxon on 9/10/96 and called a p.k. Nail. Wilcoxon excavated corner on 4/14/03 and a mag nail was found 3" down. A R.R. spike was found 10" down over an iron pin. A rebar was found 16" down. No stone was found. A #205 cast iron Harrison monument was set in position as the corner.

REF.	DISTANCE	DESCRIPTION
1.	147.94'	PK nail S PwP#1-551YA 24"up
2.	85.54'	Mag nail w/brass washer W PwP#136-551YB 36"up
3.	50.89'	PK nail E PwP#27-551XB 18"up
4.	73.63'	Top nut of fire hydrant
5.	165.00'	Due W to C/L of Countryside Dr 8300 W
6.	24.51'	PK nail SW PwP#43-551 XA 15"up